

## **TI - EYELET TYPE PRE-INSULATED TERMINALS**

TI-0,5-8

## **Description**

**Purpose:** Termination of rigid or flexible copper cables for terminal blocks.


**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.


**Application:** Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

**Application Tool:** ATI-25, ATIC-6 or ATIC-35.

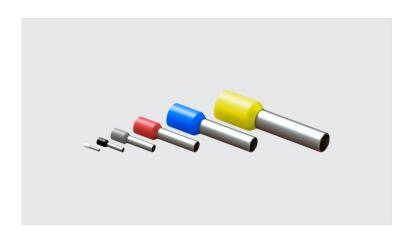

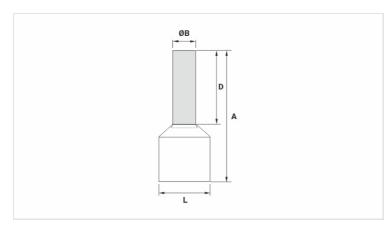

## **Datasheet**

Insulation per DIN Standard (Color)	BRANCO
Conductor	
AWG/MCM	22
mm²	0,50
Dimensions (mm)	
L	3,4
A	14,0
C	
Ø B	1,3
D	8,0
Maximum Current (A)	9
Package	
Qtd / Emb	100
Peso Unit. (g)	0,07