
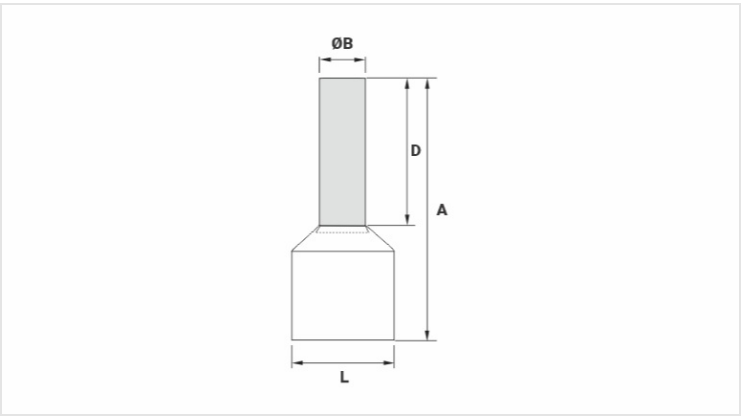


TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-0,5-8

Description

- Purpose:** Termination of rigid or flexible copper cables for terminal blocks.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.
- Material:** Electrolytic copper and nylon insulation.
- Finish:** Tin plated and insulated.
- Application Tool:** ATI-25, ATIC-6 or ATIC-35.

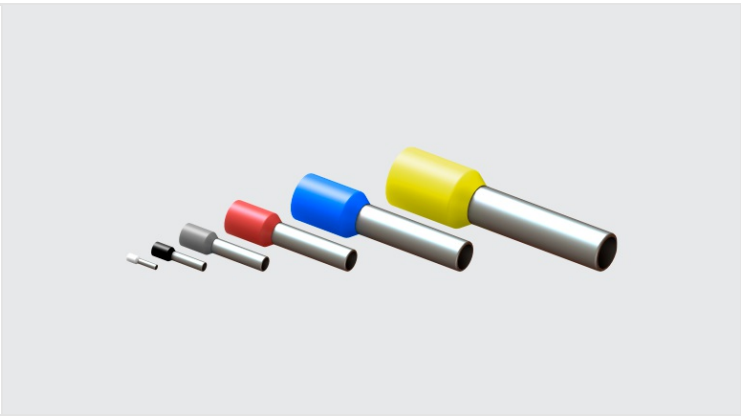

Datasheet

Insulation per DIN Standard (Color)		BRANCO / WHITE / BLANCO
Conductor		
AWG/MCM		22
mm²		0,50
Dimensions (mm)		
A		14,0
Ø C		3,4
Ø B		1,3
D		8,0
Maximum Current (A)		9
Package		
Qty. / Package		100
Unit Weight (g)		0,07