

TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-1-8

Description

Purpose: Termination of rigid or flexible copper cables for terminal blocks.



Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

Application Tool: ATI-25, ATIC-6 or ATIC-35.

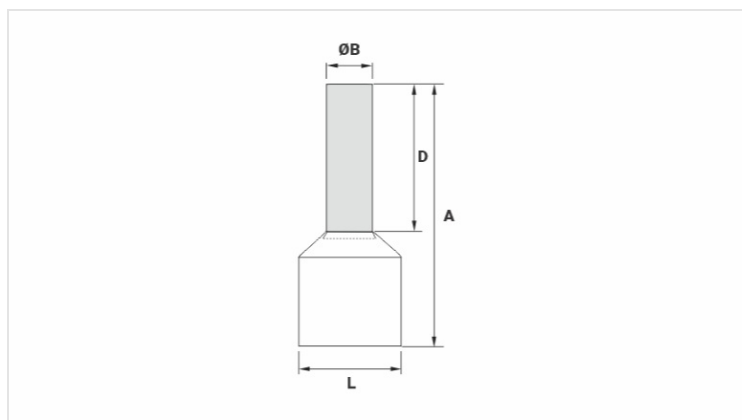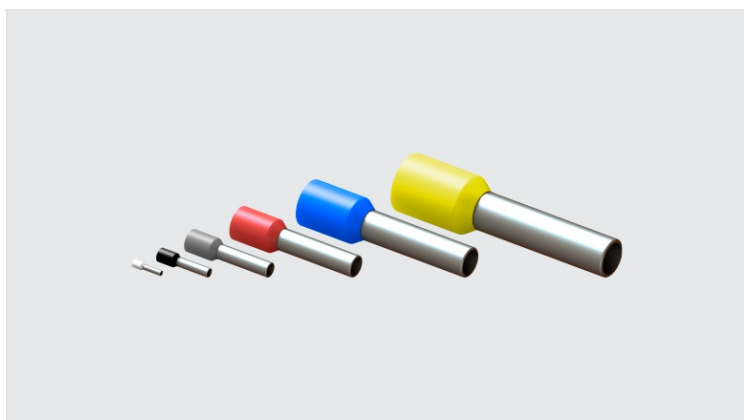

Datasheet

Insulation per DIN Standard (Color)

VERMELHO / RED / ROJO

Conductor

AWG/MCM

18

mm²

1,0

Dimensions (mm)

A

14,3

Ø C

3,6

Ø B

1,7

D

8,0

Maximum Current (A)

17

Package

Qty. / Package

100

Unit Weight (g)

0,19