

TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-1,5-8

Description

Purpose: Termination of rigid or flexible copper cables for terminal blocks.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.


Application: Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

Application Tool: ATI-25, ATIC-6 or ATIC-35.

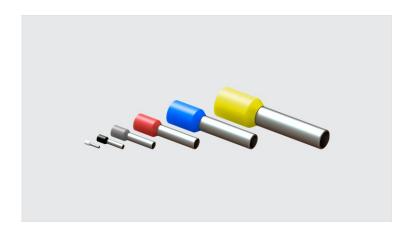

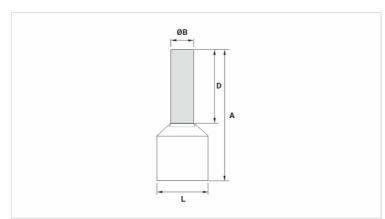

Datasheet

Insulation per DIN Standard (Color)	PRETO
Conductor	
AWG/MCM	16
mm²	1,5
Dimensions (mm)	
L	4,0
A	14,3
C	
Ø B	2,0
D	8,0
Maximum Current (A)	18
Package	
Qtd / Emb	100
Peso Unit. (g)	0,23