

TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-50-20

Description

Purpose: Termination of rigid or flexible copper cables for terminal blocks.



Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

Application Tool: ATI-25, ATIC-6 or ATIC-35.

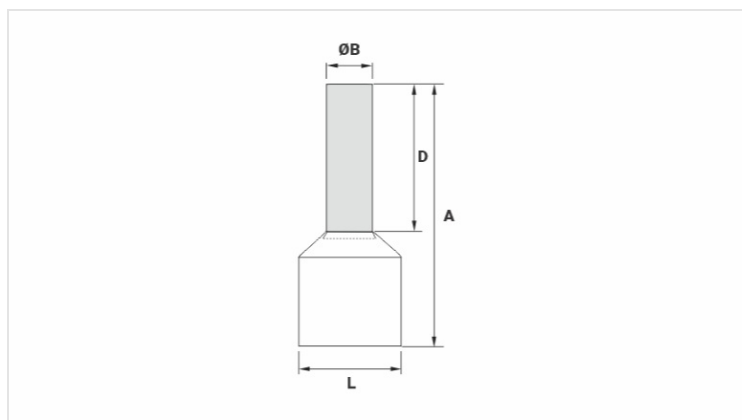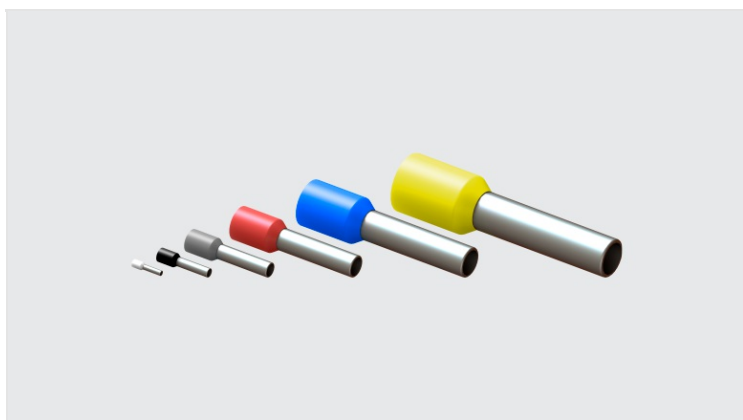

Datasheet

Insulation per DIN Standard (Color)	AZUL / BLUE
Conductor	
AWG/MCM	1/0
mm ²	50
Dimensions (mm)	
A	36,0
Ø C	16,0
Ø B	10,9
D	20,0
Maximum Current (A)	230
Package	
Qty. / Package	100
Unit Weight (g)	3,10