
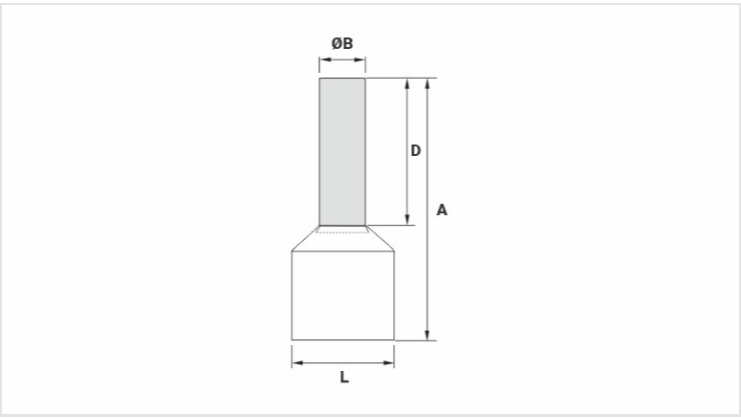


TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-50-25

Description

- Purpose:** Termination of rigid or flexible copper cables for terminal blocks.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.
- Material:** Electrolytic copper and nylon insulation.
- Finish:** Tin plated and insulated.
- Application Tool:** ATI-25, ATIC-6 or ATIC-35.

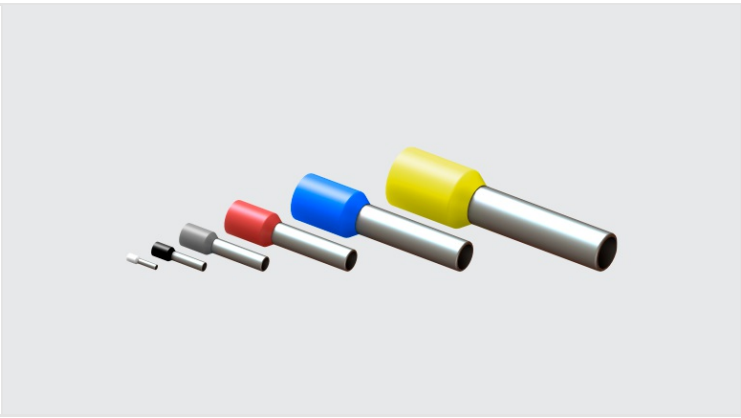

Datasheet

| | | |
|-------------------------------------|--|------|
| Insulation per DIN Standard (Color) | | AZUL |
| Conductor | | |
| AWG/MCM | | 1/0 |
| mm² | | 50 |
| Dimensions (mm) | | |
| L | | 16,0 |
| A | | 41,0 |
| C | | |
| Ø B | | 10,9 |
| D | | 25,0 |
| Maximum Current (A) | | 230 |
| Package | | |
| Qtd / Emb | | 100 |
| Peso Unit. (g) | | 3,25 |