
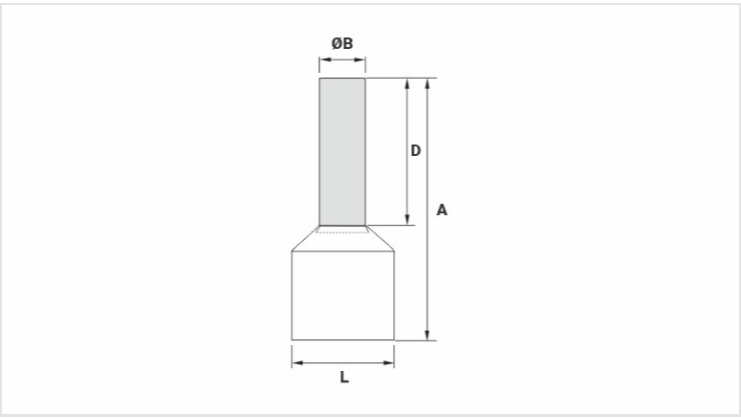


TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-70-25

Description

- Purpose:** Termination of rigid or flexible copper cables for terminal blocks.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.
- Material:** Electrolytic copper and nylon insulation.
- Finish:** Tin plated and insulated.
- Application Tool:** ATI-25, ATIC-6 or ATIC-35.

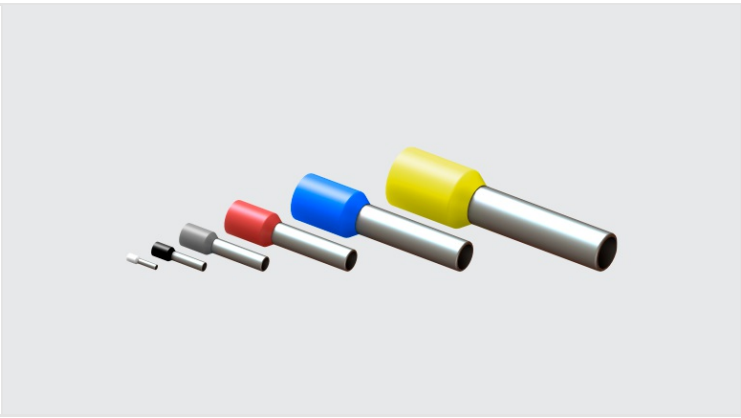

Datasheet

Insulation per DIN Standard (Color)		AMARELO / YELLOW / AMARILLO
Conductor		
AWG/MCM		2/0
mm²		70
Dimensions (mm)		
A		42,0
Ø C		17,0
Ø B		14,3
D		25,0
Maximum Current (A)		265
Package		
Qty. / Package		50
Unit Weight (g)		6,05