

TI - EYELET TYPE PRE-INSULATED TERMINALS

TI-150-32

Description

Purpose: Termination of rigid or flexible copper cables for terminal blocks.



Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

Application Tool: ATI-25, ATIC-6 or ATIC-35.

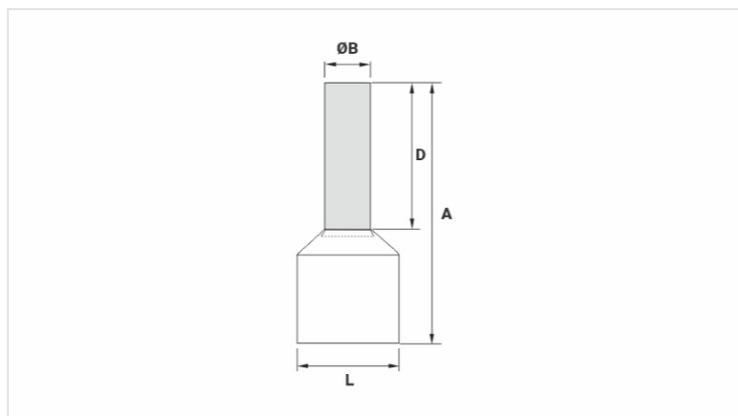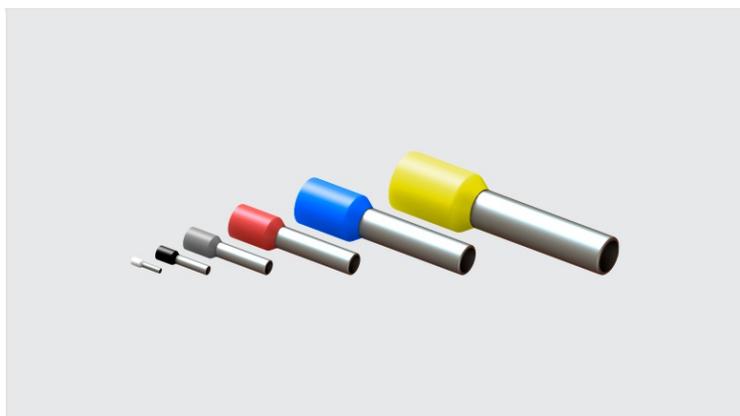

Datasheet

Insulation per DIN Standard (Color)

AMARELO / YELLOW / AMARILLO

Conductor

AWG/MCM

250 - 300

mm²

150

Dimensions (mm)

A

57,6

Ø C

25,0

Ø B

20,6

D

32,0

Maximum Current (A)

405

Package

Qty. / Package

25

Unit Weight (g)

12,90