

TID - DOBLE EYELET TYPE PRE-INSULATED TERMINALS

TID-4-12

Description

Purpose: Termination of rigid or flexible copper cables for terminal blocks. Recommended for application of two conductors.



Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 105°C and 750V.

Material: Electrolytic copper and nylon insulation.

Finish: Tin plated and insulated.

Application Tool: ATIC-6 (TID-0,5 to TID-4) or ATIC-35 (TID-6 to TID-16).

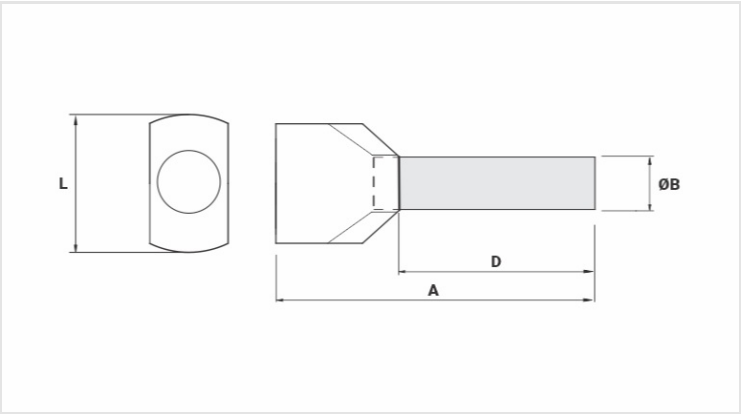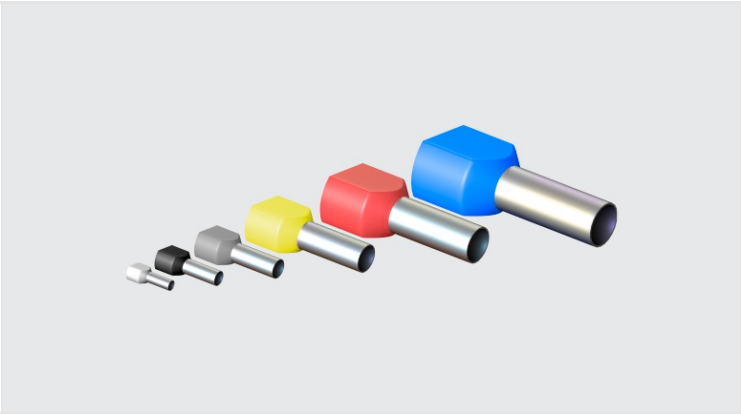

Datasheet

Insulation per DIN Standard (Color)		CINZA
Conductor		
AWG/MCM		2x 12
mm²		2x 4
Dimensions (mm)		
L		9,3
A		23,1
C		
Ø B		4,2
D		12,0
Maximum Current (A)		35
Package		
Qtd / Emb		100
Peso Unit. (g)		0,51