


CAC - ALUMINUM COMPRESSION CONNECTOR

CAC-40 A 40

Description

- Purpose:** To aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compound INTELTROX.

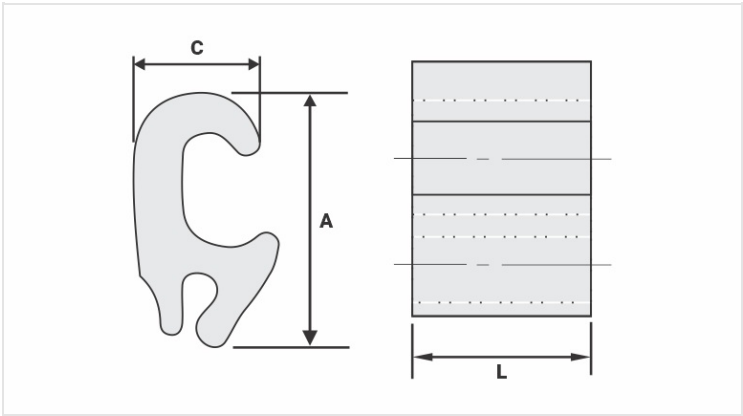

Datasheet

Conductors

Run		
AAC/Cu (AWG/MCM)		4 - 1
ACSR/AW (AWG/MCM)		6 - 2
Diameter (mm)		5,1 - 8,1
Tap		
AAC/Cu (AWG/MCM)		Fio 6 - 1
ACSR/AW (AWG/MCM)		6 - 2
Diameter (mm)		4,1 - 8,3

Dimensions (mm)

L	48,0
A	44,0
C	19,5

Application Tool

AT-61		
Die		-
Compressions		-
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-D3
Compressions		2

Package

Qty. / Package	80
Unit Weight (g)	53,40