


CAC - ALUMINUM COMPRESSION CONNECTOR

CAC-60 A 49

Description

- Purpose:** To aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compound INTELTROX.

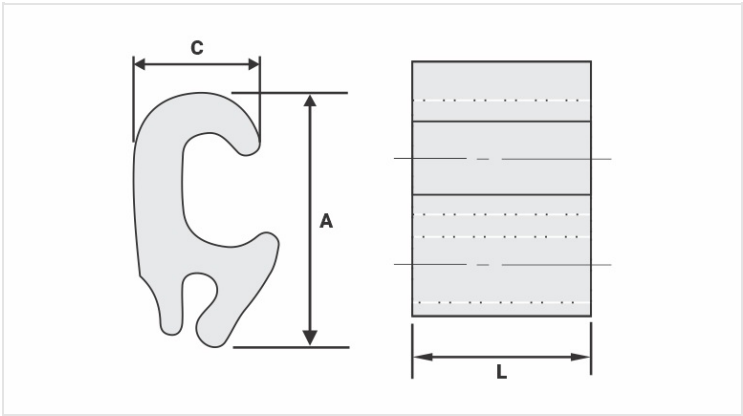

Datasheet

Conductors

Run		
AAC/Cu (AWG/MCM)		1/0 - 4/0
ACSR/AW (AWG/MCM)		1/0 - 4/0
Diameter (mm)		9,3 - 14,3
Tap		
AAC/Cu (AWG/MCM)		Fio 6 - 2/0
ACSR/AW (AWG/MCM)		6 - 1/0
Diameter (mm)		4,1 - 10,6

Dimensions (mm)

L	54,0
A	53,0
C	26,0

Application Tool

AT-61		
Die	-	
Compressions	-	
AY-96 / CY-96 / AHM-400 / AHB-400		
Die	IU-H	
Compressions	2	

Package

Qty. / Package

50

Unit Weight (g)

86,70