

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-16 A 16



Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxide compoundINTELTROX.

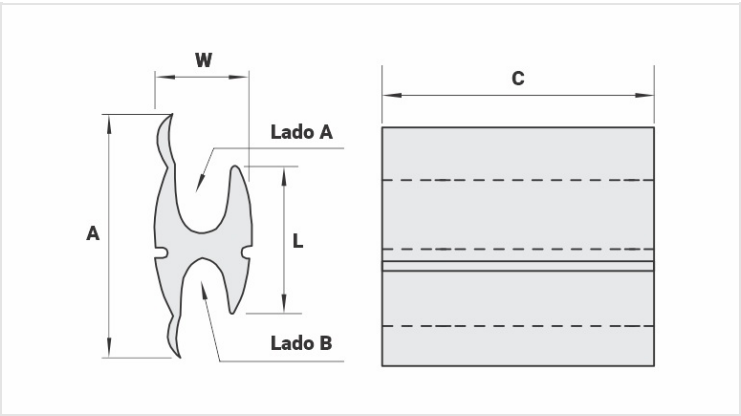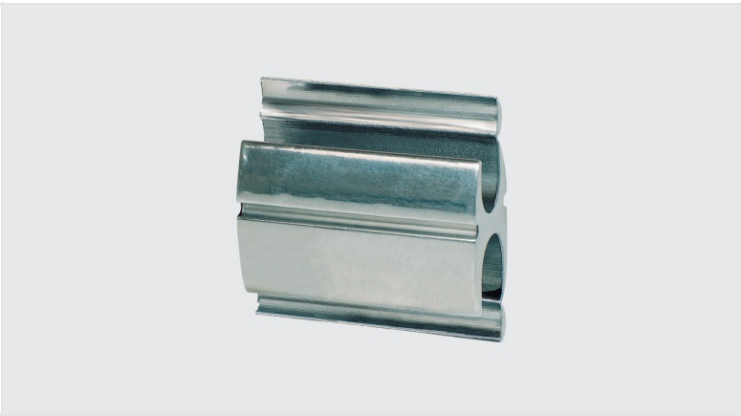

Datasheet

Conductors

Run		
AAC/Cu		fio 10 - 6 AWG 6 - 16mm²
ACSR/AW (AWG/MCM)		6
Diameter (mm)		2,6 - 5,1
Tap		
AAC/Cu		fio 10 - 6 AWG 6 - 16mm²
ACSR/AW (AWG/MCM)		6
Diameter (mm)		2,6 - 5,1

Dimensions (mm)

L	32,0
A	28,3
C	13,0

Application Tool

AT-61		
Die		IW-BG
Compressions		5
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-BG
Compressions		2

Package

Qty. / Package	200
Unit Weight (g)	15,00