
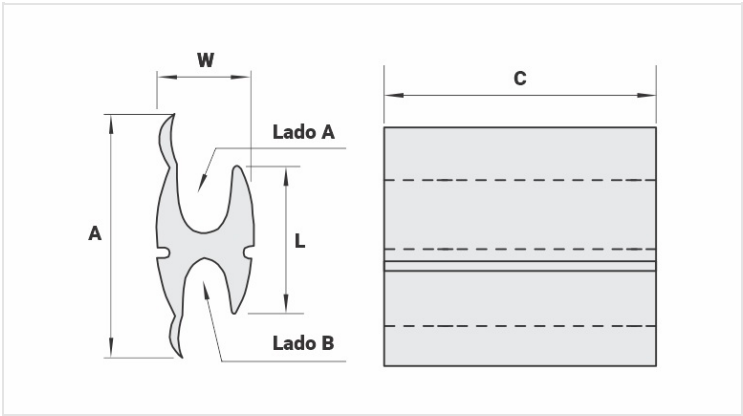


CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-35 A 10

Description

- Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compoundINTELTROX.

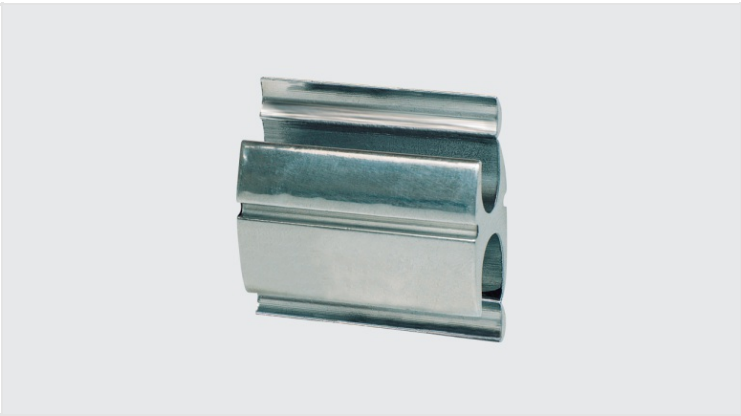

Datasheet

Conductors

Run		
AAC/Cu	4 - 2 AWG 25 - 35mm²	
ACSR/AW (AWG/MCM)		2
Diameter (mm)		5,9 - 8,0
Tap		
AAC/Cu	16 - 8 AWG 1,5 - 10mm²	
ACSR/AW (AWG/MCM)		8
Diameter (mm)		1,46 - 4,08

Dimensions (mm)

L	20,0
A	40,0
C	17,0

Application Tool

AT-61		
Die	IW-O	
Compressions		2
AY-96 / CY-96 / AHM-400 / AHB-400		
Die	IU-O	
Compressions		1

Package

Qty. / Package	200
Unit Weight (g)	20,00