

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-35 A 25



Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable for aluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxide compoundINTELTROX.

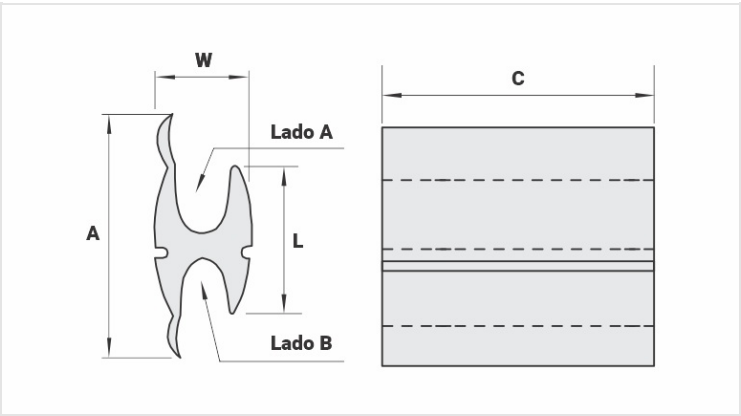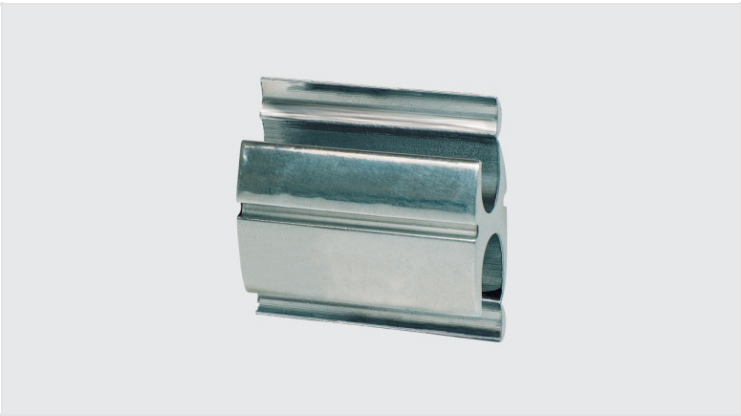

Datasheet

Conductors

Run		
AAC/Cu		fio 6 - 4 AWG 10 - 25mm²
ACSR/AW (AWG/MCM)		6 - 4
Diameter (mm)		3,6 - 6,4
Tap		
AAC/Cu		fio 6 - 4 AWG 10 - 25mm²
ACSR/AW (AWG/MCM)		6 - 4
Diameter (mm)		3,6 - 6,4

Dimensions (mm)

L	40,0
A	36,5
C	15,0

Application Tool

AT-61		
Die		IW-C
Compressions		7
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-C
Compressions		2

Package

Qty. / Package	100
Unit Weight (g)	29,50