
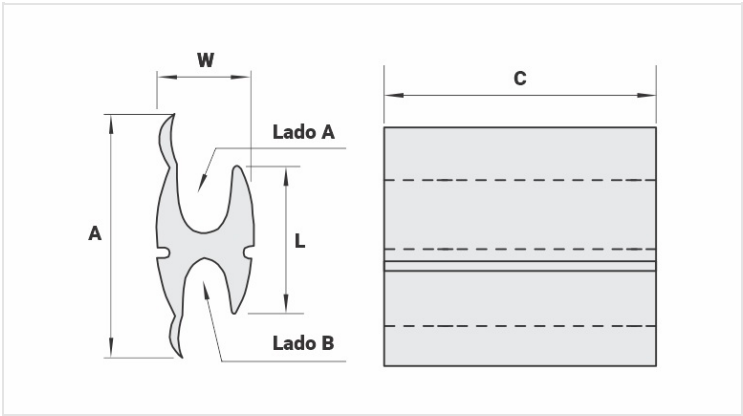


CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-35 A 35

Description

- Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compoundINTELTROX.

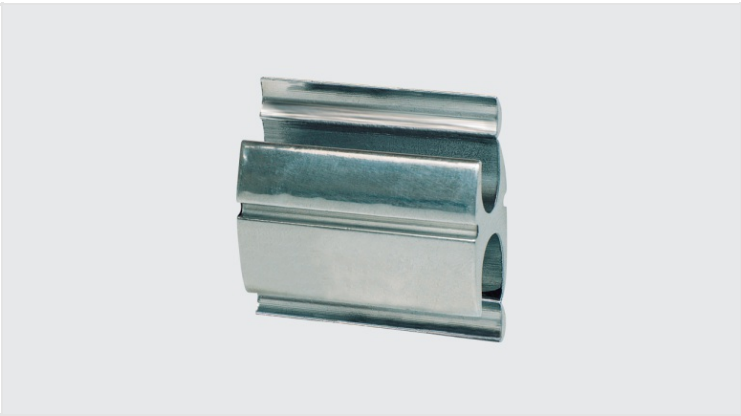

Datasheet

Conductors

Run		
AAC/Cu		6 - 1 AWG 16 - 35 mm²
ACSR/AW (AWG/MCM)		6 - 2
Diameter (mm)		4,5 - 8,3
Tap		
AAC/Cu		6 - 1 AWG 16 - 35 mm²
ACSR/AW (AWG/MCM)		6 - 2
Diameter (mm)		4,5 - 8,3

Dimensions (mm)

L	38,0
A	44,1
C	18,0

Application Tool

AT-61		
Die		IW-O
Compressions		4
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-O
Compressions		2

Package

Qty. / Package	100
Unit Weight (g)	34,60