

CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-95 A 95



Description

Purpose: Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.

Application: Power distribution lines.

Material: Extruded aluminum, Supplied with antioxide compoundINTELTROX.

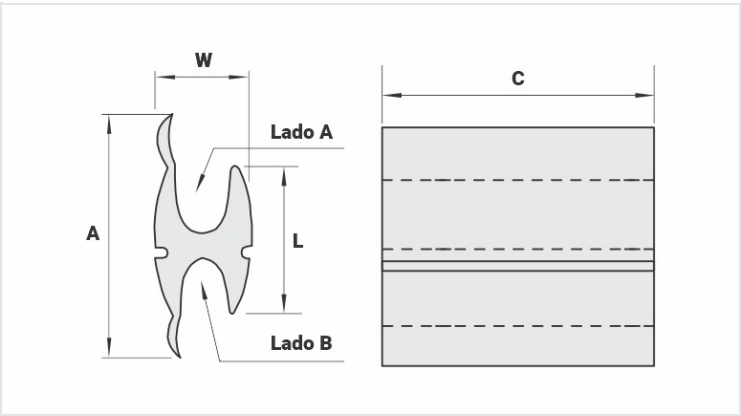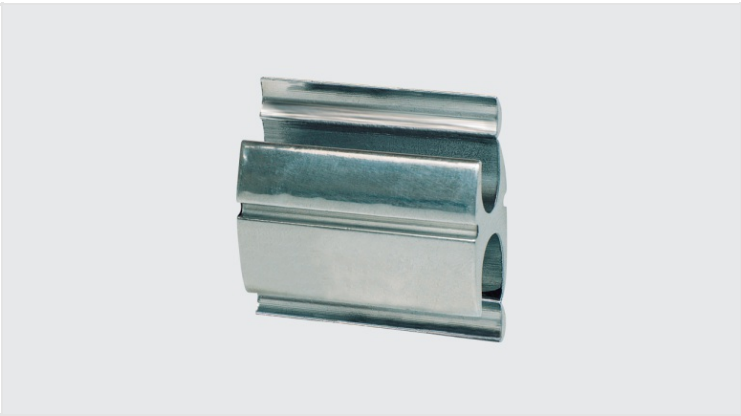

Datasheet

Conductors

Run		
AAC/Cu	1/0 - 3/0 AWG 50 - 95 mm²	
ACSR/AW (AWG/MCM)	1/0 - 2/0	
Diameter (mm)	9,4 - 11,8	
Tap		
AAC/Cu	1/0 - 3/0 AWG 50 - 95 mm²	
ACSR/AW (AWG/MCM)	1/0 - 2/0	
Diameter (mm)	9,4 - 11,8	

Dimensions (mm)

L	48,0
A	55,2
C	24,0

Application Tool

AT-61		
Die	IW-D3	
Compressions	5	
AY-96 / CY-96 / AHM-400 / AHB-400		
Die	IU-D3	
Compressions	2	

Package

Qty. / Package	50
Unit Weight (g)	69,00