
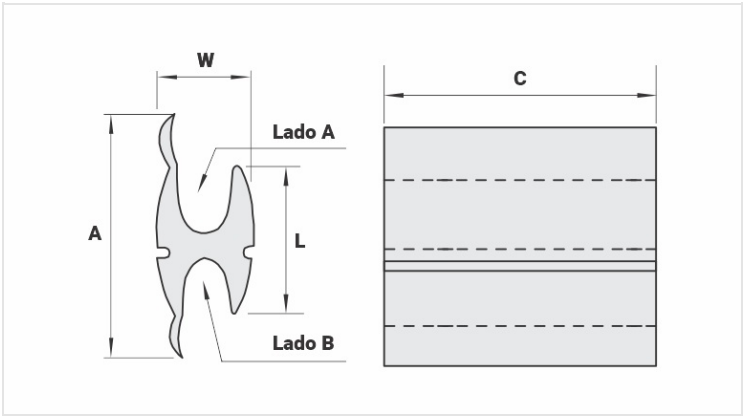


CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-120 A 120

Description

- Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compoundINTELTROX.

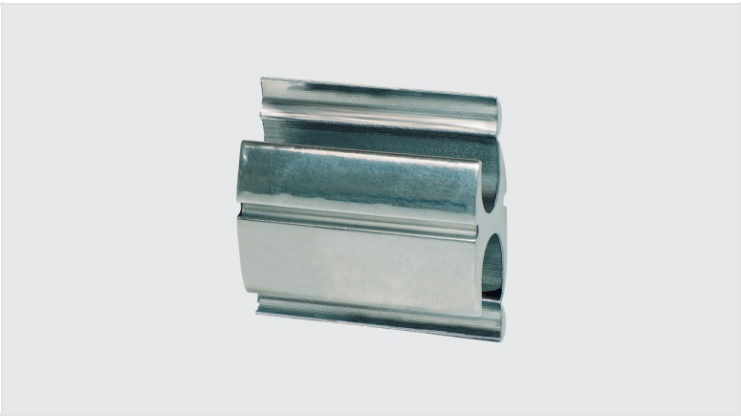

Datasheet

Conductors

Run		
AAC/Cu		1/0 - 4/0 AWG 50 - 120 mm²
ACSR/AW (AWG/MCM)		1/0 - 4/0
Diameter (mm)		8,9 - 14,3
Tap		
AAC/Cu		1/0 - 4/0 50 - 120 mm²
ACSR/AW (AWG/MCM)		1/0 - 4/0
Diameter (mm)		8,9 - 14,3

Dimensions (mm)

L	63,0
A	62,8
C	22,0

Application Tool

AT-61		
Die		IW-D3
Compressions		6
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-D3
Compressions		2

Package

Qty. / Package	40
Unit Weight (g)	75,00