
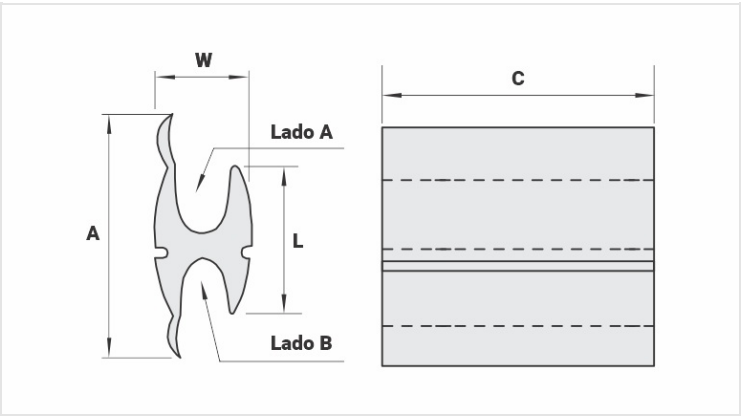


CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-240 A 70

Description

- Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compoundINTELTROX.

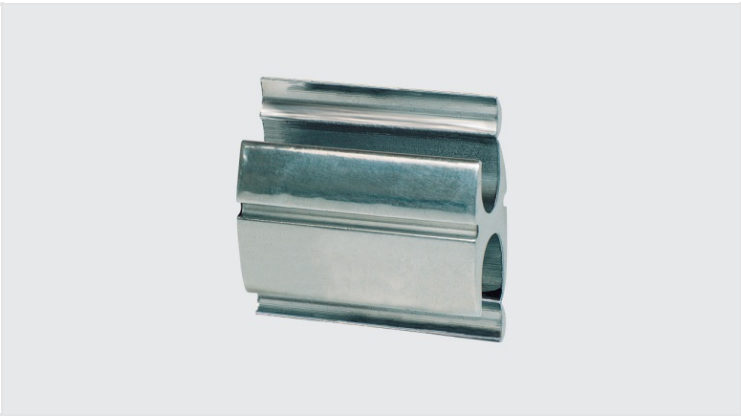

Datasheet

Conductors

Run	
AAC/Cu	4/0 AWG - 500 MCM 120 - 240mm²
ACSR/AW (AWG/MCM)	4/0 - 397,5
Diameter (mm)	13,2 - 20,6
Tap	
AAC/Cu	fio 8 - 3/0 AWG 10 - 70 mm²
ACSR/AW (AWG/MCM)	6 - 2/0
Diameter (mm)	3,26 - 11,8

Dimensions (mm)

L	50,0
A	72,4
C	31,9

Application Tool

AT-61		
Die		-
Compressions		-
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-N
Compressions		2

Package

Qty. / Package	30
Unit Weight (g)	123,60