
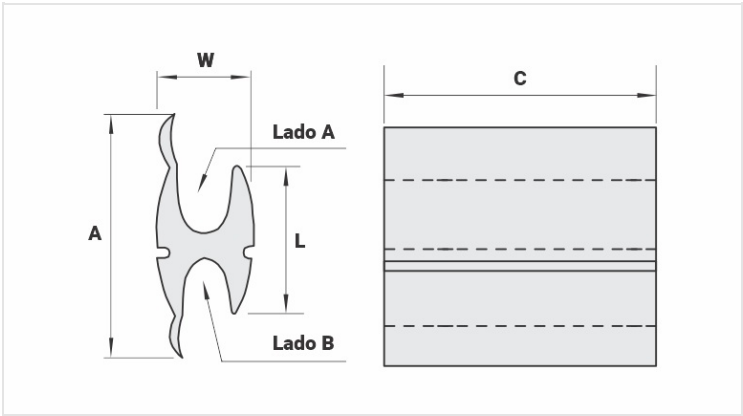


CAH - ALUMINUM COMPRESSION CONNECTOR ("H" TYPE)

CAH-240 A 240

Description

- Purpose:** Aluminum CA, CAA or copper cables tap connector. Suitable foraluminum-aluminum and aluminum-copper connections.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Connection keeps the conductors separate to minimize the effects of galvanic corrosion, enabling a bimetallic connection.
- Application:** Power distribution lines.
- Material:** Extruded aluminum, Supplied with antioxide compoundINTELTROX.

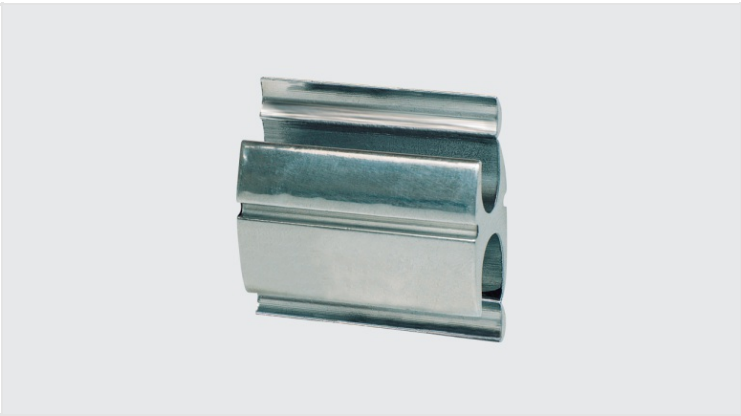

Datasheet

Conductors

Run		
AAC/Cu	4/0 AWG - 500 MCM 120 - 240 mm²	
ACSR/AW (AWG/MCM)		4/0 - 397,5
Diameter (mm)		13,2 - 20,6
Tap		
AAC/Cu	4/0 - 500 AWG 120 - 240 mm²	
ACSR/AW (AWG/MCM)		4/0 - 397,5
Diameter (mm)		13,2 - 20,6

Dimensions (mm)

L	89,0
A	81,0
C	31,0

Application Tool

AT-61		
Die	-	
Compressions	-	
AY-96 / CY-96 / AHM-400 / AHB-400		
Die		IU-N
Compressions		3

Package

Qty. / Package

15

Unit Weight (g)

202,00