

CDC ASYMMETRIC - WEDGE CONNECTOR

CDC-A-VI

Description


Purpose: Copper or aluminum CA and CAA cable tap. Suitable for copper-copper, copper-aluminum and aluminum-copper connections.

Characteristics: Spring system connection (permanent tightening). High electrical conductivity and corrosion resistance.

Application: Power distribution lines.

Material: Copper alloy. Supplied with antioxidant compound INTELTROX.

Finish: Tin plated. Application Tool: 12" water pump plier.

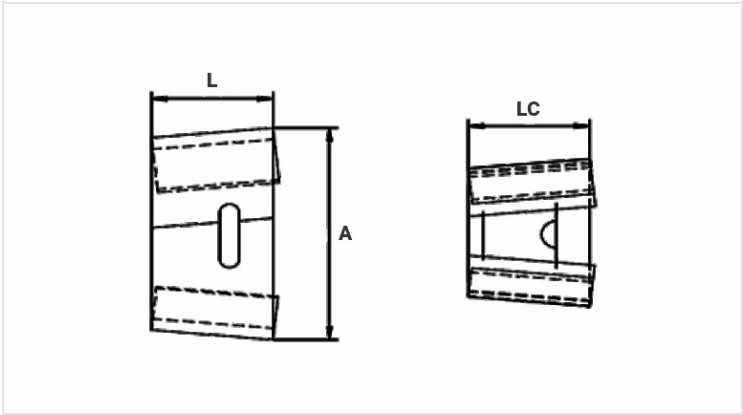

Datasheet

Type	A
Reference Color	VIOLETA / VIOLET
Selection per Diameter	
Run (mm)	
Min.	5,60
Max.	9,36
Tap (mm)	
Min.	1,74
Max.	5,10
Sum of Conductors (mm)	
Min.	9,10
Max.	10,95
Dimensions (mm)	
L	19,0
A	40,7
LC	19,0
Package	
Qty. / Package	100
Unit Weight (g)	31,20

