


CDCEL - WEDGE TYPE TAP CONNECTOR WITH STIRRUP (SIDE MODEL)

CDCEL-VII

Description

- Purpose:** Connection with copper, CA or CAA aluminum cables. Allows ing of up to four wedge types or compression connectors.
- Characteristics:** Spring system connection (permanent tightening). High electrical conductivity and resistance to corrosion.
- Application:** Power distribution lines.
- Material:** Copper alloy body and wedge and Electrolytic copper stirrup.Supplied with antioxide compound INTELTROX.
- Finishing (Stirrup):** Tin plated.
- Application Tool:** 12" water pump pliers.

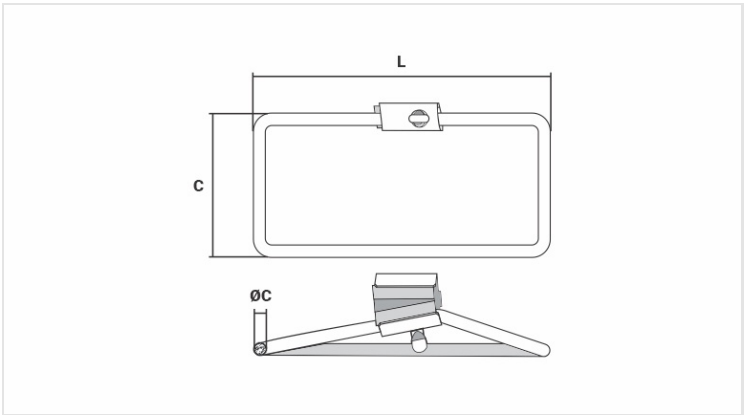

Datasheet

Conductors		
Run		
AWG/MCM		2 - 1/0
mm²		35 - 50
Stirrup (AWG)		2
Sum of Conductors (mm)		
Min.		13,95
Max.		16,78
Dimensions (mm)		
L		156,00
C		76,0
Ø C		6,5
Package		
Qty. / Package		40
Unit Weight (g)		82,00