CDCEL - WEDGE TYPE TAP CONNECTOR WITH STIRRUP (SIDE MODEL)

CDCEL-VII

Description

Purpose: Connection with copper, CA or CAA aluminum cables. Allows ing of up to four wedge types or compression connectors.

Characteristics: Spring system connection (permanent tightening). High electrical conductivity and resistance to corrosion.


Application: Power distribution lines.

Material: Copper alloy body and wedge and Electrolytic copper stirrup.Supplied with antioxide compound INTELTROX.

Finishing (Stirrup): Tin plated.

Application Tool: 12” water pump pliers.



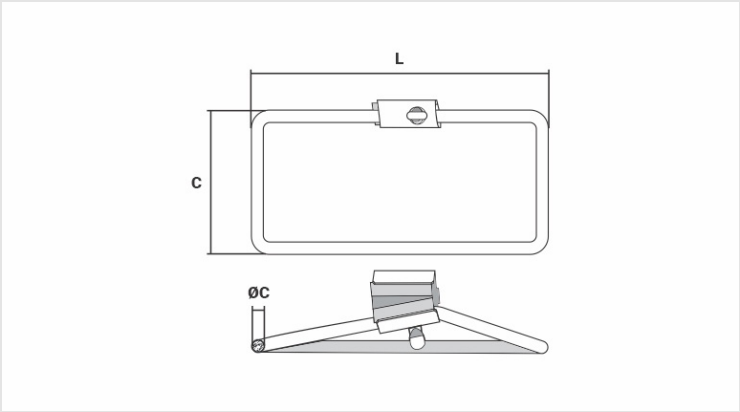

Datasheet

Conductors	
Run	
AWG/MCM	2 - 1/0
mm²	35 - 50
Stirrup (AWG)	2
Sum of Conductors (mm)	
Min.	13,95
Max.	16,78
Dimensions (mm)	
L	156,00
C	76,0
Ø C	6,5
Package	
Qty. / Package	40
Unit Weight (g)	82,00