

LEB - ALUMINUM COMPRESSION CONNECTOR WITH STIRRUP

LEB-40

Description


**Purpose:** Connection with CA or CAA aluminum cables. Enables ing of a hotline clamp, ing of up to four wedge type or compression connectors.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution lines.

**Material:** Extruded aluminum body and stirrup in electrolytic copper. Supplied with antioxide compound INTELTROX.

**Finishing (Stirrup):** Tin plated.

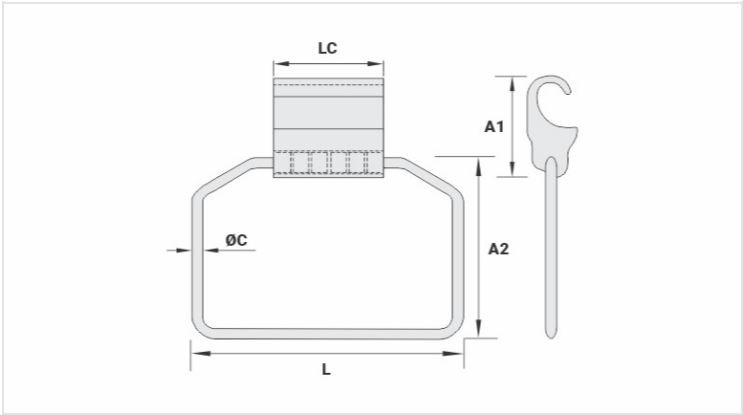

Datasheet

Conductors

|               |       |
|---------------|-------|
| CA/Cu (AWG)   | 2 - 1 |
| CAA (AWG/MCM) | 2     |

Stirrup (AWG)

|  |   |
|--|---|
|  | 2 |
|--|---|

Dimensions (mm)

|     |       |
|-----|-------|
| L   | 131,0 |
| LC  | 48,0  |
| A1  | 40,0  |
| A2  | 86,0  |
| Ø C | 6,5   |

Application Tool (AY-96/CY-96)

|             |        |
|-------------|--------|
| Matriz      | 20     |
| Compressões | 165,40 |