LEB - ALUMINUM COMPRESSION CONNECTOR WITH STIRRUP

LEB-40

Description

Purpose: Connection with CA or CAA aluminum cables. Enables ing of a hotline clamp, ing of up to four wedge type or compression connectors.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Power distribution lines.

Material: Extruded aluminum body and stirrup in electrolytic copper. Supplied with antioxide compound INTELTROX.

Finishing (Stirrup): Tin plated.



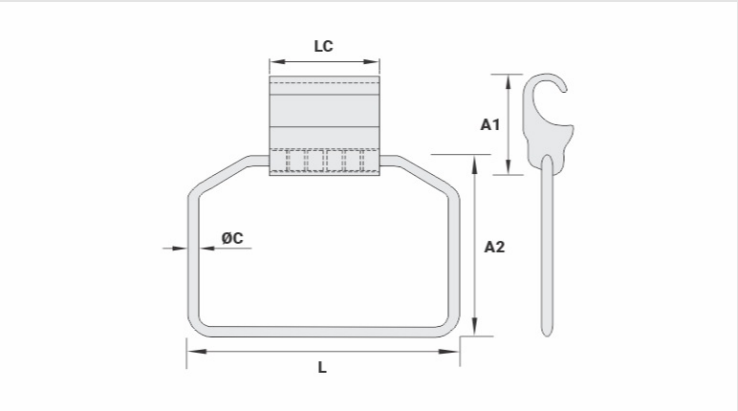

Datasheet

Conductors	
AAC/Cu (AWG)	2 - 1
ACSR/AW (AWG/MCM)	2
Stirrup (AWG)	2
Dimensions (mm)	
L	131,0
LC	48,0
A1	40,0
A2	86,0
Ø C	6,5
Application Tool (AY/CY/AHM/AHB)	
Die	IU-D
Compressions	2