

LEB - ALUMINUM COMPRESSION CONNECTOR WITH STIRRUP

LEB-60

Description


Purpose: Connection with CA or CAA aluminum cables. Enables ing of a hotline clamp, ing of up to four wedge type or compression connectors.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Power distribution lines.

Material: Extruded aluminum body and stirrup in electrolytic copper. Supplied with antioxidant compound INTELTROX.

Finishing (Stirrup): Tin plated.

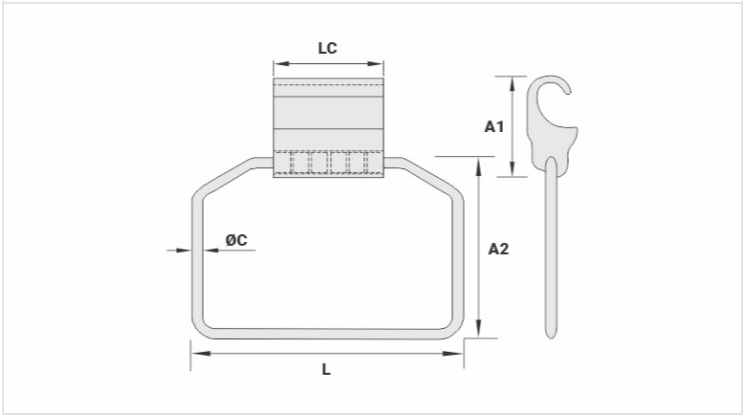

Datasheet

Conductors

AAC/Cu (AWG)	1/0 - 4/0
ACSR/AW (AWG/MCM)	1/0 - 4/0

Stirrup (AWG)

	2
--	---

Dimensions (mm)

L	131,0
LC	54,0
A1	48,0
A2	86,0
Ø C	6,5

Application Tool (AY/CY/AHM/AHB)

Die	IU-H
Compressions	2