# LEB - ALUMINUM COMPRESSION CONNECTOR WITH STIRRUP

LEB-60

## Description

**Purpose:** Connection with CA or CAA aluminum cables. Enables ing of a hotline clamp, ing of up to four wedge type or compression connectors.


**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution lines.

**Material:** Extruded aluminum body and stirrup in electrolytic copper. Supplied with antioxide compound INTELTROX.

**Finishing (Stirrup):** Tin plated.



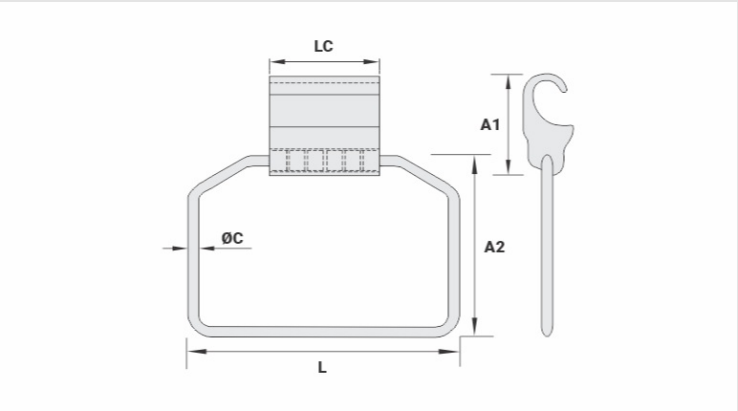


## Datasheet

| | |
|---|---|
| **Conductors** | |
| AAC/Cu (AWG) | 1/0 - 4/0 |
| ACSR/AW (AWG/MCM) | 1/0 - 4/0 |
| **Stirrup (AWG)** | 2 |
| **Dimensions (mm)** | |
| L | 131,0 |
| LC | 54,0 |
| A1 | 48,0 |
| A2 | 86,0 |
| Ø C | 6,5 |
| **Application Tool (AY/CY/AHM/AHB)** | |
| Die | IU-H |
| Compressions | 2 |