LCBF - CAST ALUMINUM COMPRESSION CONNECTOR WITH STIRRUP

LCBF-44

Description


Purpose: Connection with CA, CAA aluminum cables. Enables ing of a hotline clamp oring of up to four wedge type or compression connectors.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Power distribution lines.

Material: Cast aluminum body and stirrup in electrolytic copper. Supplied with antioxide compound INTELTROX.

Finishing (Stirrup): Tin plated.

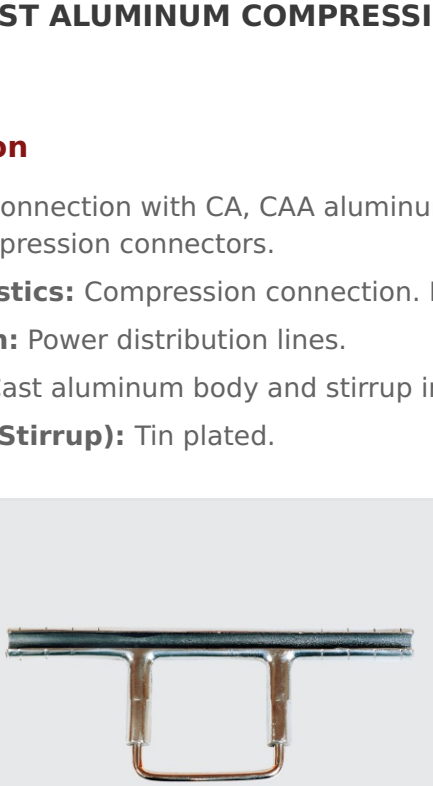

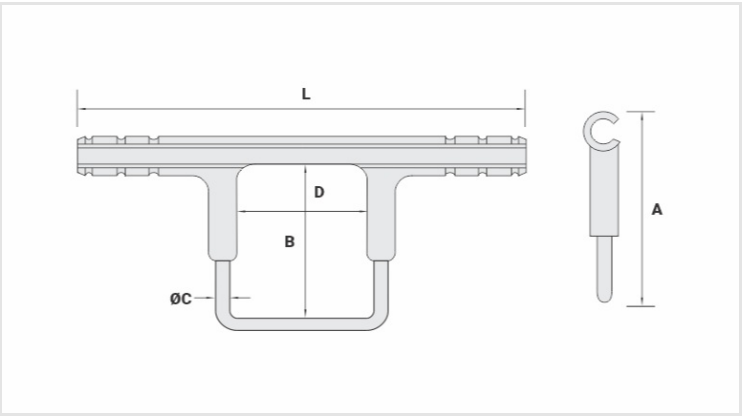

Datasheet

Conductors	
AAC/ACSR	1/0
Dimensions (mm)	
L	248,0
A	113,0
B	89,0
D	64,0
Ø E	6,3
Application Tool	
AT-61	
Die	IW-C
Compressions	4
AY-96 / CY-96 / AHM-400 / AHB-400	
Die	IU-C
Compressions	2
Package	
Qty. / Package	25
Unit Weight (g)	236,20