

CDPF - PIERCING CONNECTOR FOR FLEXIBLE CONDUCTORS

CDPF-35-35

Description


Purpose: Connection between input branch (Flexible copper cable Class-4/5 - PVC insulation 450 / 750v without cover) and connection branch (multiplexed CA aluminum conductors - XLPE / PE 0.6 / 1kV - phase and neutral (insulated or bare)).

Characteristics: Connection by piercing (no need to strip the insulation from the cable). It has a shear head nut to ensure a perfect connection. It has compensation springs that ensure a constant pression in the connection.

Application: Overhead insulated electricity distribution networks.

Material: Polymer connector resistant to weather and U.V rays. Tin plated copper contacts.

Application Tool: Star or socket wrench.

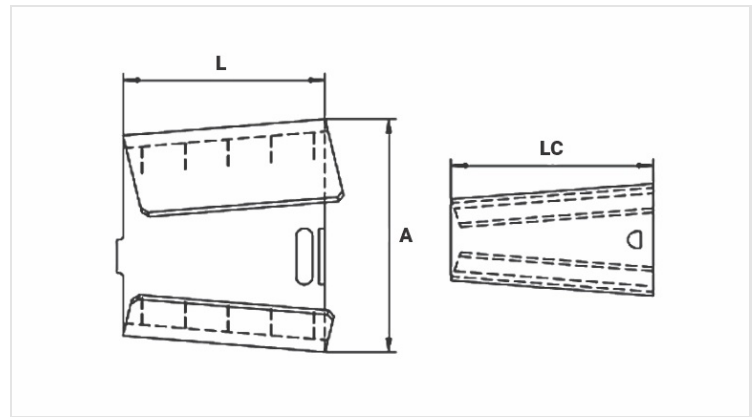

Datasheet

Conductors

Principal - CA/Cu - Classe2 (mm²) 10 - 35

Derivação - Cu- Classe 4/5 (mm²) 25 - 35

Dimensions (mm)

L 36,0

A 65,0

C 19,0

Package

Qtd / Emb 50

Peso Unit. (g) 69,20