

CDPN - PIERCING CONNECTOR FOR BARE NETWORK

CDPN-70

Description


Purpose: Cables tapping. Suitable for connection to the main / trunk (bare line) and tap (insulated line). Suitable for aluminum to aluminum, aluminum to copper or copper to copper connections (low voltage up to 1kV).

Characteristics: Connection by piercing the insulation only on the tap side (there is no need to strip the cable insulation). It has a shear head nut to ensure a perfect application.

Application: OVERHEAD power distribution lines bare (run side) and insulated (tap side).

Material: Weatherproof polymer and U.V. connector, tin plated copper contacts.

Application Tool: Star or socket wrench.

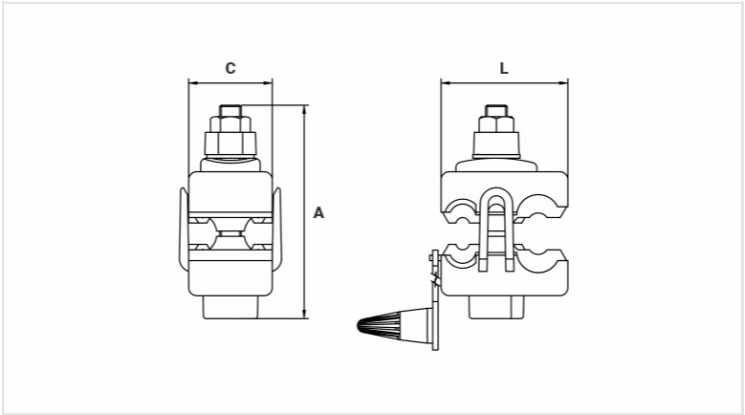

Datasheet

Conductors (AAC/Cu)		
Run (Bare Line)		
	mm²	35 - 95
	AWG/MCM	2 - 3/0
Tap (Insulated Line)		
	mm²	1,5 - 10
	AWG/MCM	16 - 8
Dimensions (mm)		
L		40,0
A		65,0
C		23,0
Package		
Qty. / Package		100
Unit Weight (g)		58,20