

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-35

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.

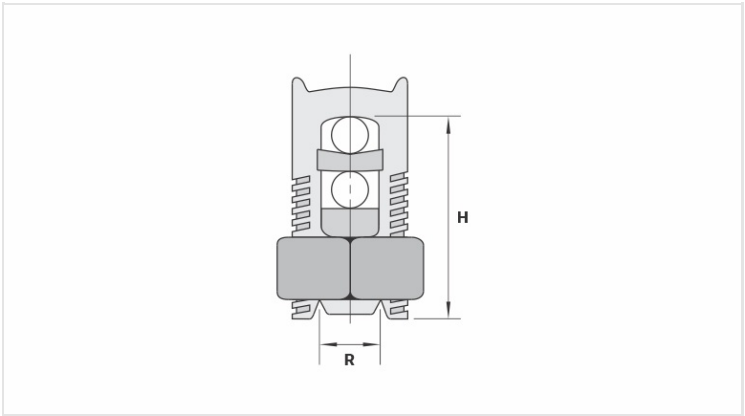

Datasheet

Conductors		
Run (mm²)		35
Tap (mm²)		4 - 35
Dimensions (mm)		
L		15,6
A		31,0
C		19,0
D		7,9
E		28,4
Package		
Qty. / Package		50
Unit Weight (g)		49,50