

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-50

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.

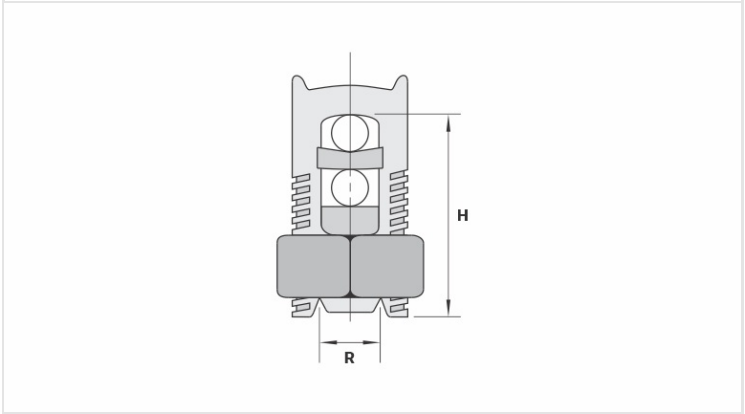

Datasheet

Conductors		
Run (mm²)		50
Tap (mm²)		4 - 50
Dimensions (mm)		
L		18,0
A		35,5
C		20,0
D		9,5
E		33,0
Package		
Qty. / Package		30
Unit Weight (g)		71,70