PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-50

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.


Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.



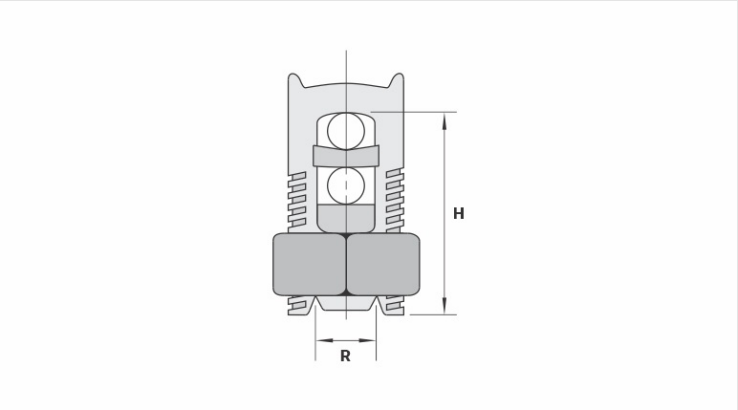

Datasheet

Conductors	
Run (mm²)	50
Tap (mm²)	4 - 50
Dimensions (mm)	
L	18,0
A	35,5
C	20,0
D	9,5
E	33,0
Package	
Qty. / Package	30
Unit Weight (g)	71,70