PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-120

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.


Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.



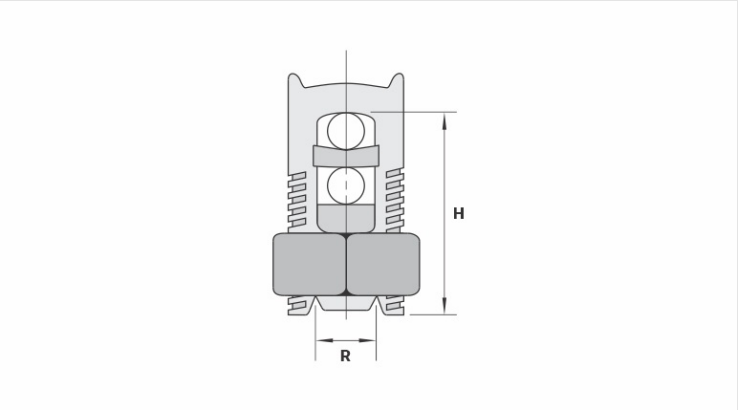

Datasheet

Conductors	
Run (mm²)	120
Tap (mm²)	10 - 120
Dimensions (mm)	
L	26,8
A	51,0
C	28,0
D	14,7
E	48,0
Package	
Qty. / Package	15
Unit Weight (g)	167,00