

PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-150

Description

**Purpose:** Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.

**Application:** Power distribution lines and grounding in general.

**Material:** Body in eletrolytic copper, nut, rider and spacer in copper alloy.

**Finish:** Tin plated.

**Application Tool:** Box open-ended or monkey wrenches.

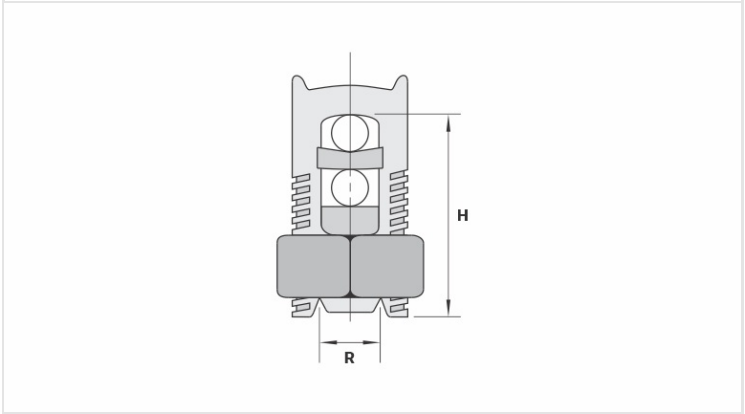

Datasheet

Conductors		
Run (mm²)		150
Tap (mm²)		16 - 150
Dimensions (mm)		
L		26,0
A		55,0
C		28,0
D		16,2
E		52,0
Package		
Qty. / Package		15
Unit Weight (g)		183,00