GTSB - GROUNDING CLAMP (1 CONDUCTOR)

GTSB-300-500

Description

Purpose: Cable to busbar connections. Suitable for copper or COPPERSTEEL cables.

Characteristics: Tightening connection. Electrical conductivity and corrosion resistant. Single conductor version. Screw length suitable for plate / bar thickness up to 7mm.


Application: Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunications networks).

Material: Bronze clamp, fittings in copper alloy or hot galvanized steel.

Application Tool: Spanner set or open-ended wrench.

*Also available tin plated.



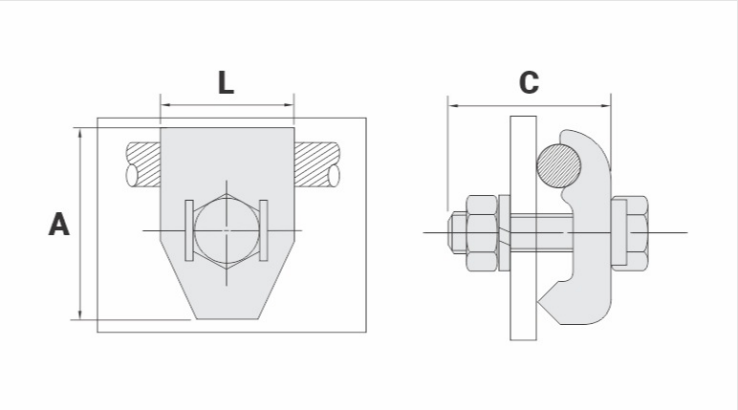

Datasheet

Conductor	
AWG/MCM	300 - 500
mm²	150 - 240
Dimensions (mm)	
L	37,0
A	58,0
C	70,0
Screw - E	M12
Figure	1
Package	
Qty. / Package	25
Unit Weight (g)	253,00