
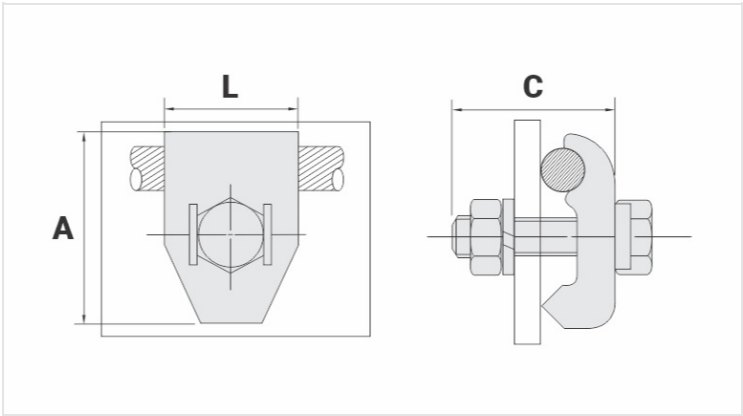


GTSB - GROUNDING CLAMP (1 CONDUCTOR)

GTSB-4-2/0

Description

- Purpose:** Cable to busbar connections. Suitable for copper or COPPERSTEEL cables.
- Characteristics:** Tightening connection. Electrical conductivity and corrosion resistant. Single conductor version. Screw length suitable for plate / bar thickness up to 7mm.
- Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunications networks).
- Material:** Bronze clamp, fittings in copper alloy or hot galvanized steel.
- Application Tool:** Spanner set or open-ended wrench.
- \*Also available tin plated.

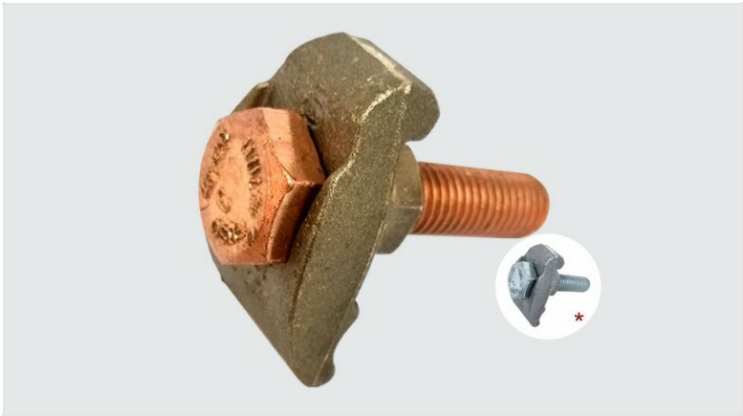

Datasheet

Conductor		
AWG/MCM		4 - 2/0
mm²		16 - 70
Dimensions (mm)		
L		27,0
A		40,0
C		45,0
Screw - E		M10
Figure		1
Package		
Qty. / Package		30
Unit Weight (g)		129,00