# GTSB - GROUNDING CLAMP (1 CONDUCTOR)

GTSB-4-2/0

## Description

**Purpose:** Cable to busbar connections. Suitable for copper or COPPERSTEEL cables.

**Characteristics:** Tightening connection. Electrical conductivity and corrosion resistant. Single conductor version. Screw length suitable for plate / bar thickness up to 7mm.


**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunications networks).

**Material:** Bronze clamp, fittings in copper alloy or hot galvanized steel.

**Application Tool:** Spanner set or open-ended wrench.

*Also available tin plated.



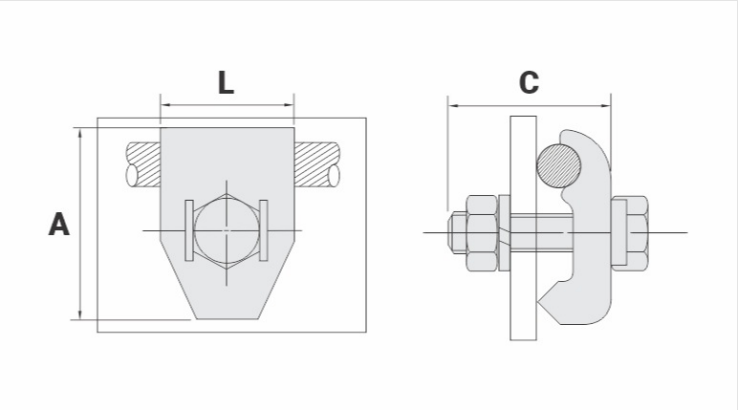


## Datasheet

| | |
|---|---|
| **Conductor** | |
| AWG/MCM | 4 - 2/0 |
| mm² | 16 - 70 |
| **Dimensions (mm)** | |
| L | 27,0 |
| A | 40,0 |
| C | 45,0 |
| Screw - E | M10 |
| Figure | 1 |
| **Package** | |
| Qty. / Package | 30 |
| Unit Weight (g) | 129,00 |