


ICAL-CA - ALUMINUM STRANDED CONDUCTORS (AAC)

ICAL-1192,5-CA

Description

Suitable for power transmission in urban and rural overhead lines, the bare aluminum cable (AC) alloy 1350 (H19 temper) is a stranded conductor (class 2), concentric.

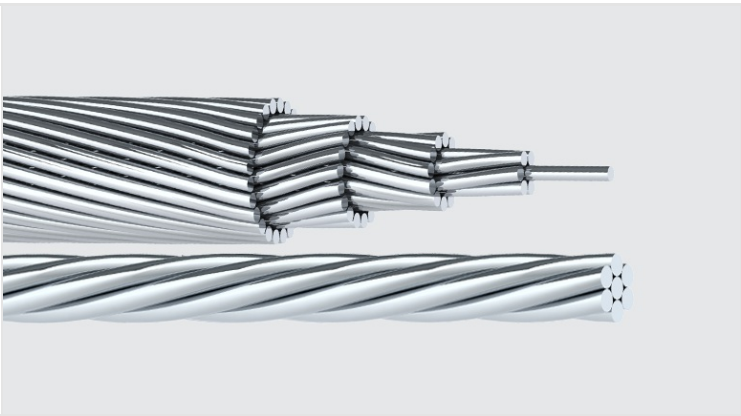

Datasheet

International Code		Hawthorn
Area		
AWG/MCM		1192,5
mm²		603,777
Formation		
Qty. Of Wires		61
Diameter of Wires (mm)		3,55
Nominal Diameter of Cable (mm)		31,95
Nominal Total Weight (kg/km)		1665,00
Breaking Load (kN)		93,46
Temper		H19
Electrical Characteristics		
Maximum Resistance to 20°C in DC (ohms/km)		0,0476
Maximum Electrical Resistance AC - 60Hz - 75°C (ohms/km)		-
Inductive Reactance - 60Hz (ohms/km)		-
Capacitive Reactance - 60Hz (ohms/km)		-
Steady-State Current Capacity - 75°C (A)		-
Package		
Reel Type		-
Nominal Length (m)		-
Net Weight per Reel (kg)		-
Gross Weight per Reel With Packing (kg)		-