

GTDU2C - U-BOLT GROUNDING CLAMP (2 CONDUCTORS)

GTDU2C 1.1/2" IPS 4-2/0

Description


Purpose: Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect two parallel cables.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).

Material: Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.

Application Tool: Spanner set or open-ended wrench.

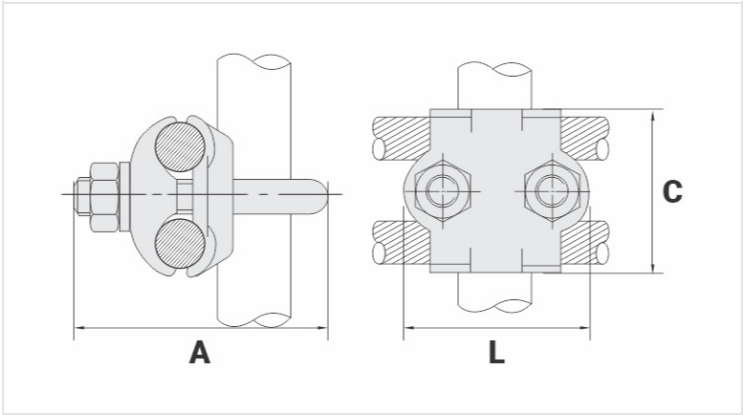

Datasheet

Conductor

AWG/MCM	4 - 2/0
mm²	16 - 70

Ground Rod Nominal Diameter (inches)

-

IPS Tube

1.1/2"

Accessory Material

Dimensions (mm)

L	85,0
A	99,0
C	44,0
Screw "U"	M10
Figure	2

Package

Qty. / Package
Unit Weight (g)