TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-50-13

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



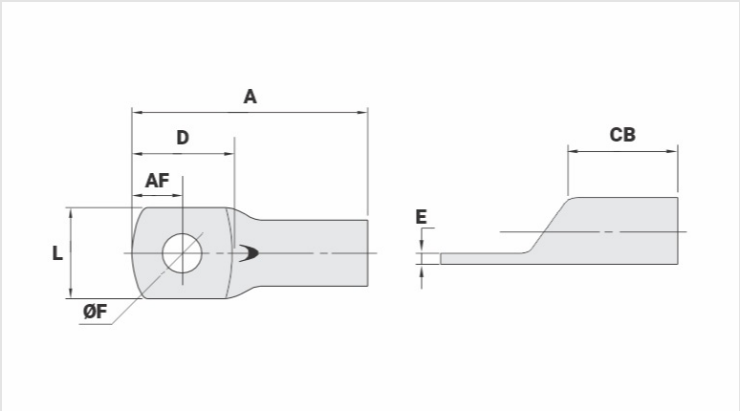

Datasheet

Conductors - Cross Section (mm²)	50
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	18,0
A	42,5
CB	16,0
AF	9,0
D	19,5
E	2,7
Current (A)	275
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-1
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-2
Hexagonal Die	H-2

Package	
Qty. / Package	100
Unit Weight (g)	13,80