TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-70-8

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



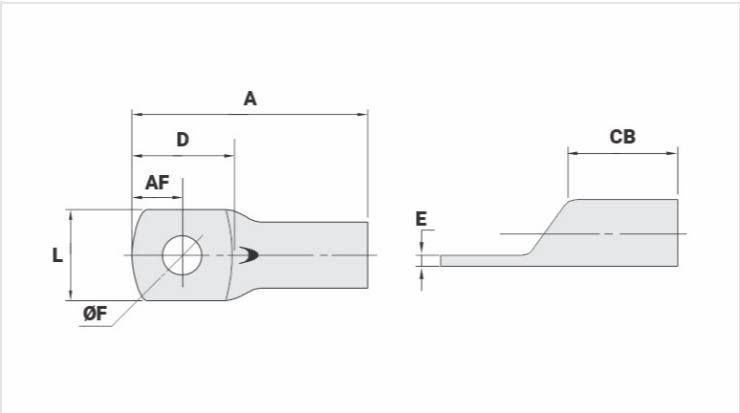

Datasheet

Conductors - Cross Section (mm²)	70
Dimensions (mm)	
Hole Diameter (mm)	8,5
Screw*	
Inches	5/16
Metric	M8
L	20,4
A	43,4
CB	16,0
AF	9,5
D	20,0
E	2,85
Current (A)	353
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-26
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-26
Hexagonal Die	H-26

Package	
Qty. / Package	50
Unit Weight (g)	22,50