

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-95-13

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.

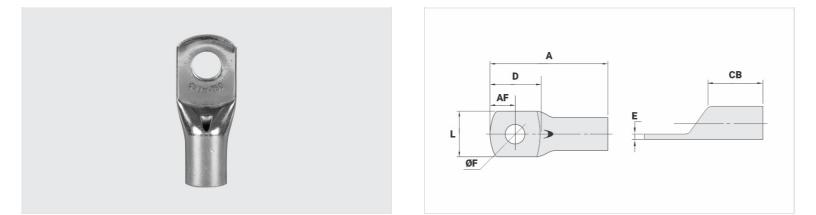

Datasheet

Conductors - Cross Section (mm ²)	95
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	24,0
A	49,0
CB	17,5
AF	10,0
D	22,0
E	3,0
Current (A)	430
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-27
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-27
Hexagonal Die	H-27

Package

Qty. / Package

Unit Weight (g)