TF - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / SHORT BARREL)

TF-240

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.



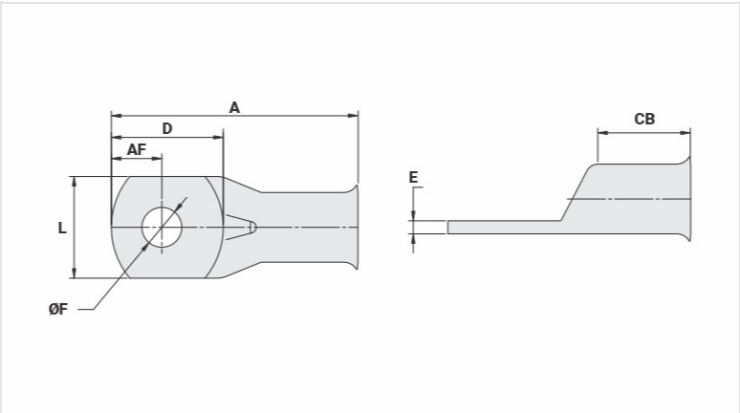

Datasheet

Conductors - Cross Section (mm²)	240
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	37,4
A	74,5
CB	26,0
AF	13,7
D	32,0
E	4,4
Current (A)	781
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-34**
Hexagonal Die	H-34

Package	
Qty. / Package	20
Unit Weight (g)	116,00