TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-95-L

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.



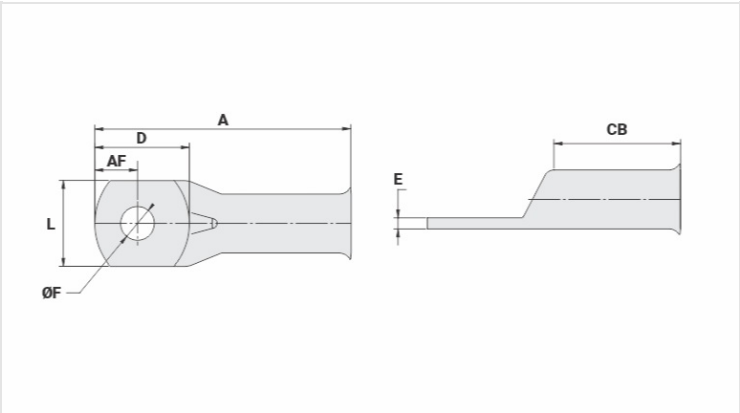

Datasheet

Conductors - Cross Section (mm²)	95
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	24,0
A	60,0
CB	28,5
AF	10,0
D	22,0
E	3,0
Current (A)	430
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-27
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-27
Hexagonal Die	H-27

Package	
Qty. / Package	50
Unit Weight (g)	32,10