

TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-500-2L

Description


Purpose: Termination of copper conductors.

Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.

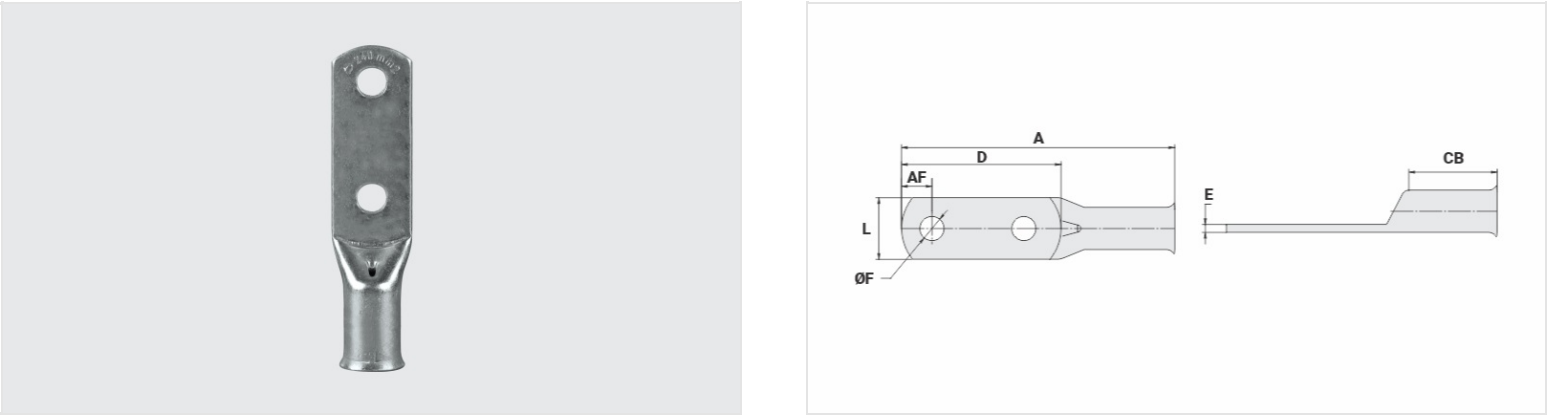

Datasheet

Conductors - Cross Section (mm²)	500
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	52,0
A	172,0
CB	66,0
AF	19,0
D	86,4
E	5,1
Current (A)	1253
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-44
Hexagonal Die	H-44

Package	
Qty. / Package	10
Unit Weight (g)	390,00