
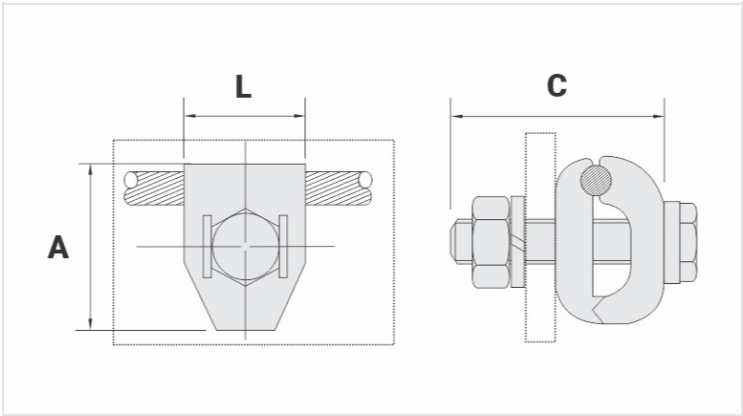


GTDB - BUSBAR DOUBLE GROUNDING CLAMPS (1 CONDUCTOR)

GTDB-300-500

Description

- Purpose:** Cable to busbar connections. Suitable for COPPERSTEEL or copper cables.
- Characteristics:** Tightening connection. High electrical conductivity and corrosion resistant. Single conductor version. Enough screw length for plate/bar thickness up to 7mm.
- Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building, industrial grounding, grounding in telecommunication networks).
- Material:** Bronze clamp, fittings in copper alloy or hot galvanized steel.
- Application Tool:** Spanner set or open-ended wrench.
- *Also available tin plated.

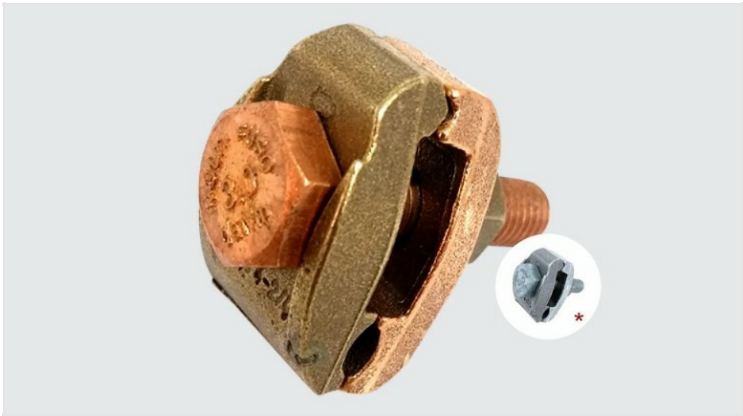

Datasheet

Conductor		
Cross Section (AWG/MCM)		300 - 500
mm²		150 - 240
Dimensions (mm)		
L		39,0
A		62,0
C		70,0
Screw - E		M12
Figure		1
Package		
Qty. / Package		15
Unit Weight (g)		462,00