PFB - BIMETALLIC SPLIT BOLT CONNECTOR WITH SPACER

PFB-25

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL, copper or aluminum cables. Suitable for copper to copper, copper to aluminum and aluminum to copper connections.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance. Allows bimetallic connection.


Application: Power distribution lines and grounding in general.

Material: Body in eletrolytic copper, nut, rider and spacer in copper alloy.

Finish: Tin plated.

Application Tool: Box open-ended or monkey wrenches.



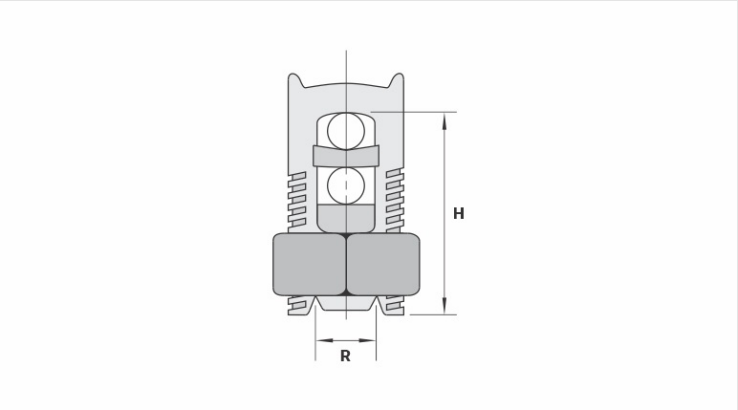

Datasheet

Conductors	
Run (mm²)	25
Tap (mm²)	4 - 25
Dimensions (mm)	
L	14,7
A	27,0
C	17,0
D	6,8
E	25,0
Package	
Qty. / Package	50
Unit Weight (g)	38,80